


	WN 1423			380 HV
---	---------	--	---	--------

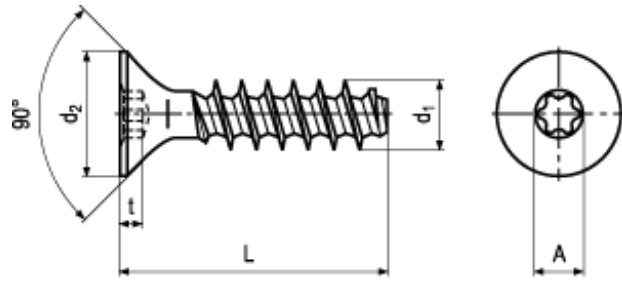

BN 11308

Flat countersunk head PT® screws

Torx plus® / Autosert®

Steel heat-treated 380 HV

zinc plated blue



ISO 4042

Fasteners hardness ≥ 320 HV with electroplated coatings:
Susceptible to hydrogen embrittlement!
Further notice to residual risks can be found in the
introduction section.



A technical brochure is available on request

Article#	ø nominal	d1	d2		A~	t min.	t max.	L
3060086	K22	2,2	3,8	6 IP	1,75	0,65	0,8	6
3060088								8
3060092								10
3060093	K25	2,5	4,7	8 IP	2,4	0,7	0,9	6
3592059								7
3060094								8
3060095								10
3060096								12
3060097	K30	3	5,5	8 IP	2,4	0,85	1	8
3060098								10
3060099								12
3060100								16
3060102	K35	3,5	7,3	15 IP	3,35	0,95	1,2	10
3060104								12
3060105								16