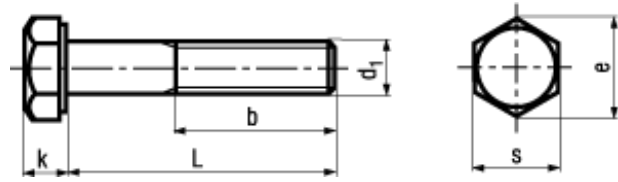


	DIN 960	ISO 8765		8.8
---	----------------	-----------------	--	------------

Standard withdrawn

**BN 66****Hex head bolts**

partially threaded, with metric fine thread

Steel 8.8

black

- ~UNI 5738

M10; M12; M14: wrench size according to ISO on request

Article#	d ₁	e	k	s	b	L
1055720	M8x1	14,38	5,3	13	22	35
1055739						40
1055747						45
1055755						50
1055763						55
1055771						60
1055798						70
1055801						80
1811916	M10x1	18,9	6,4	17	26	40
1812270						45
1816993						50
1817183						55
1817396						60
1817507						70
1769472						80
1769480						100
1055887	M10x1,25	18,9	6,4	17	26	40
1055895						45
1055909						50
1055917						55
1055925						60
1055941						70

M10; M12; M14: wrench size according to ISO on request

Article#	d ₁	e	k	s	b	L
3092088	M10x1,25	18,9	6,4	17	26	75
1055968						80
3092089						90
1056212						100
1056042	M12x1,25	21,1	7,5	19	30	45
1056050						50
1056069						55
1056077						60
3092091						65
1056093						70
1056107						80
8238715						90
1056115						100
1055976						120
1769499	M12x1,5	21,1	7,5	19	30	45
1769502						50
1769510						55
1769529						60
1769537						70
1769545						80
1772694						100
1772708						120
1056182	(M14x1,5)	24,49	8,8	22	34	50
1056190						55
1056204						60
1056220						70
1056239						80
1415964						100
1415972						120
1056301	M16x1,5	26,75	10	24	38	55
1056328						60
1056336						70
1056344						80
3092092						90
1056352						100
1415980						120
1056395	(M18x1,5)	30,14	11,5	27	42	60
1056409						70
1056417						80
1056425						100
1056433						120

M10; M12; M14: wrench size according to ISO on request

Article#	d ₁	e	k	s	b	L
1056492	M20x1,5	33,53	12,5	30	46	70
1056506						80
1056514						100
1056522						120
1056646	M24x2	39,98	15	36	54	80
1056654						100
1056662						120