


TufLok®

BN 5211 - Hex socket set screws with flat point and TufLok® patch

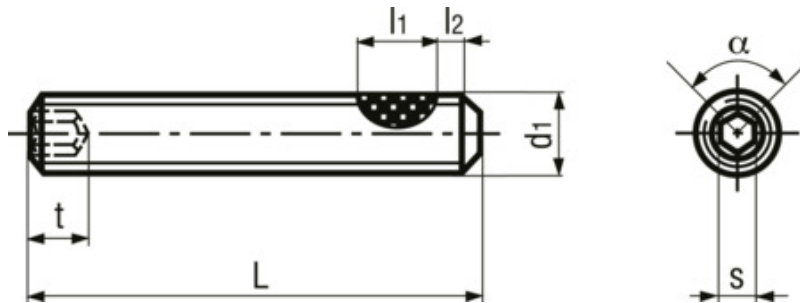

Standard **ISO 4026**, DIN 913, ~UNI 5923, ~ČSN 021187

Manufacturer

TufLok®

Additional information

Coating angle α in the screw body area approx. 90°. Edge zone (spray transition) up to 180°. Coating length $l_1 = \sim 4$ to 6 thread turns. Around 1 to 2 thread turns remain uncoated to ensure flawless installation (l_2).

Drive Hexagon socket

Brand TufLok®

Material Steel

Surface zinc flake coated

Hardness 45 H

Warnings Set screws are not intended to be tensile-loaded.

Article no.	d1	L	s	t min.
1576291	M8	8	4	3
1370588	M8	10	4	5
1370596	M8	12	4	5
1370618	M8	16	4	5
1370626	M8	20	4	5