
BN 20146 — Hexalobular (6 Lobe) socket head cap screws with extremely low head



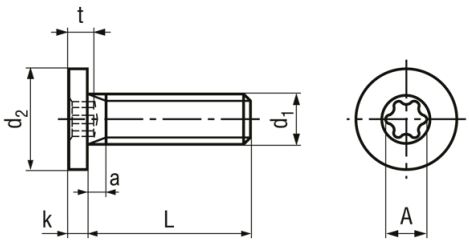


Additional information	Fasteners to the given specification have a reduced loadability due to the head geometry according to ISO 3506-1.
Headform	Cylindrical extremely low
Drive	Hexalobular socket
Thread	fully threaded
Material	Stainless steel
Material type	A2

© Bossard / 27-08-2026 / Subject to change without notice.

BN 20146 — Hexalobular (6 Lobe) socket head cap screws with extremely low head



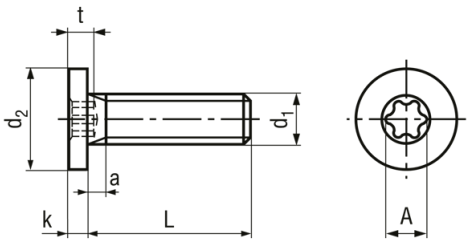


Article No.	d1	L	d2	k max.	a max.	Hexalobular socket	t max.	A~
3233653	M2	4	4	1,27	1,2	X5	0,9	1,5
3233654	M2	5	4	1,27	1,2	X5	0,9	1,5
3233655	M2	6	4	1,27	1,2	X5	0,9	1,5
3233656	M2	8	4	1,27	1,2	X5	0,9	1,5
3233657	M2,5	4	5	1,37	1,35	X6	1	1,75
3233658	M2,5	5	5	1,37	1,35	X6	1	1,75
3233659	M2,5	6	5	1,37	1,35	X6	1	1,75
3233660	M2,5	8	5	1,37	1,35	X6	1	1,75
3233661	M3	5	6	1,37	1,5	X8	1,1	2,4
3233662	M3	6	6	1,37	1,5	X8	1,1	2,4
3233663	M3	8	6	1,37	1,5	X8	1,1	2,4
3233664	M3	10	6	1,37	1,5	X8	1,1	2,4
3233665	M4	6	8	1,5	1,6	X10	1,5	2,8
3233666	M4	8	8	1,5	1,6	X10	1,5	2,8
3233668	M4	10	8	1,5	1,6	X10	1,5	2,8
3233669	M4	12	8	1,5	1,6	X10	1,5	2,8
3233670	M5	6	9	1,5	2	X15	1,8	3,35
3233671	M5	8	9	1,5	2	X15	1,8	3,35
3233673	M5	10	9	1,5	2	X15	1,8	3,35
3233674	M5	12	9	1,5	2	X15	1,8	3,35
3233675	M5	16	9	1,5	2	X15	1,8	3,35
3233677	M6	8	10	1,5	2,5	X20	2,1	3,95
3233678	M6	10	10	1,5	2,5	X20	2,1	3,95
3233679	M6	12	10	1,5	2,5	X20	2,1	3,95
3233682	M6	16	10	1,5	2,5	X20	2,1	3,95
3233683	M6	20	10	1,5	2,5	X20	2,1	3,95
3233684	M8	8	13	1,5	3	X25	2,4	4,5

© Bossard / 27-08-2026 / Subject to change without notice.

BN 20146 — Hexalobular (6 Lobe) socket head cap screws with extremely low head



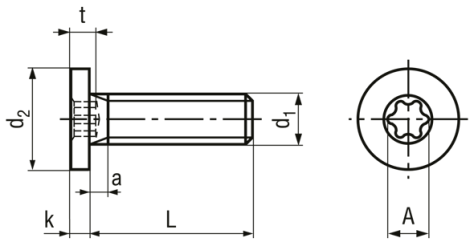

Article No.	d1	L	d2	k max.	a max.	Hexalobular socket	t max.	A~
3233686	M8	10	13	1,5	3	X25	2,4	4,5
3233687	M8	12	13	1,5	3	X25	2,4	4,5
3233688	M8	16	13	1,5	3	X25	2,4	4,5
3233689	M8	20	13	1,5	3	X25	2,4	4,5

© Bossard / 27-08-2026 / Subject to change without notice.