


TufLok®

BN 5244 - Hex head screws fully threaded with TufLok® patch

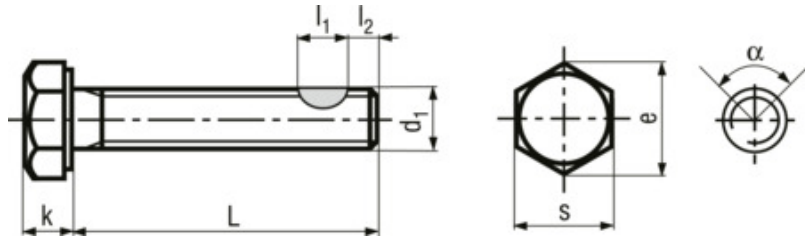

Standard

DIN 933 (Standard withdrawn), ISO 4017, ~UNI 5739, ~ČSN 021103

Manufacturer

TufLok®

Additional information

Coating angle α in the screw body area approx. 90°. Edge zone (spray transition) up to 180°.
Coating length $l_1 = \sim 4$ to 6 thread turns.
Around 2 to 3 thread turns remain uncoated to ensure flawless installation (l_2).

Headform

Hexagon

Drive

Hexagon

Thread

fully threaded

Brand

TufLok®

Material

Steel

Property class

8.8

Surface

zinc plated blue

M10; M12: wrench size according to ISO on request

Article no.	d1	L	e	k	s
1379453	M5	10	8,79	3,5	8
1379461	M5	16	8,79	3,5	8
1379488	M5	20	8,79	3,5	8
1379496	M6	16	11,05	4	10
1379518	M6	20	11,05	4	10
1379526	M6	25	11,05	4	10
1379534	M6	30	11,05	4	10

Article no.	d1	L	e	k	s
1379542	M8	20	14,38	5,3	13
1379550	M8	25	14,38	5,3	13
1379569	M8	30	14,38	5,3	13
1379577	M8	35	14,38	5,3	13
1581651	M10	16	18,9	6,4	17
1379585	M10	20	18,9	6,4	17
1379593	M10	25	18,9	6,4	17
1379607	M10	30	18,9	6,4	17
1379615	M10	35	18,9	6,4	17
1379623	M10	40	18,9	6,4	17
1379631	M12	20	21,1	7,5	19
1379658	M12	25	21,1	7,5	19
1379666	M12	30	21,1	7,5	19
1379674	M12	35	21,1	7,5	19
1379682	M12	40	21,1	7,5	19
1379690	M12	45	21,1	7,5	19
1581678	M12	50	21,1	7,5	19