

3.15 TO-GRX

Indextrut fast-fixing stop screw



Material



Steel

Coating



Zinc-plated

Valid for




Indextrut slotted channel

Installation Data

Code	A	B	E	H	M	L	SW
TGRX0830	19	33	12,5	30	M8	40	13
TGRX0860	19	33	12,5	60	M8	40	13
TGRX1030	19	33	12,5	30	M10	40	17
TGRX1060	19	33	12,5	60	M10	40	17

Drawing

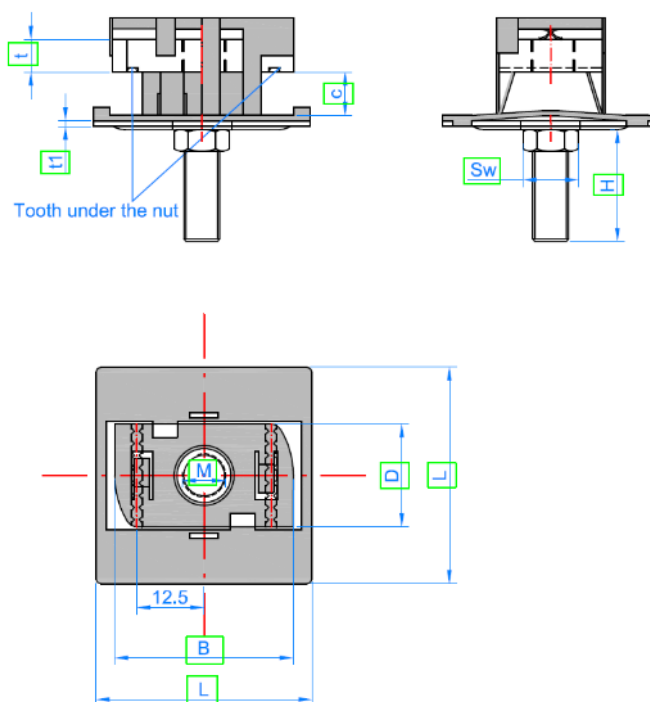

Maximum recommended sliding and tension loads

Code	Channel	Installation torque [Nm]	Sliding load [kN]	Tension load [kN]
TGRX0830 / TGRX0860	GPX412115 / GPX414115	14.9	1.19	4,07
TGRX1030 / TGRX1060		25.8	1.23	
TGRX0830 / TGRX0860	GPX412120 / GPX414120	14.9	1.19	7,34
TGRX1030 / TGRX1060		25.8	1.23	
TGRX0830 / TGRX0860	GPX412125 / GPX414125	14.9	1.19	8,11
TGRX1030 / TGRX1060		25.8	1.23	